


PIER NO.	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24	P25	P26
CONC. SIZE	14"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"
WEIGHT	3,300	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700
STAIRS	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"
ELEV. BOT.	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'

PIER NO.	P27	P28	P29	P30	P31	P32	P33	P34	P35	P36	P37	P38	P39	P40	P41	P42	P43	P44	P45	P46	P47	P48	P49	P50	P51	P52
CONC. SIZE	14"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	12"x24"	
WEIGHT	3,300	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	2,700	
STAIRS	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	11"x12"	
ELEV. BOT.	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	-4.11'	

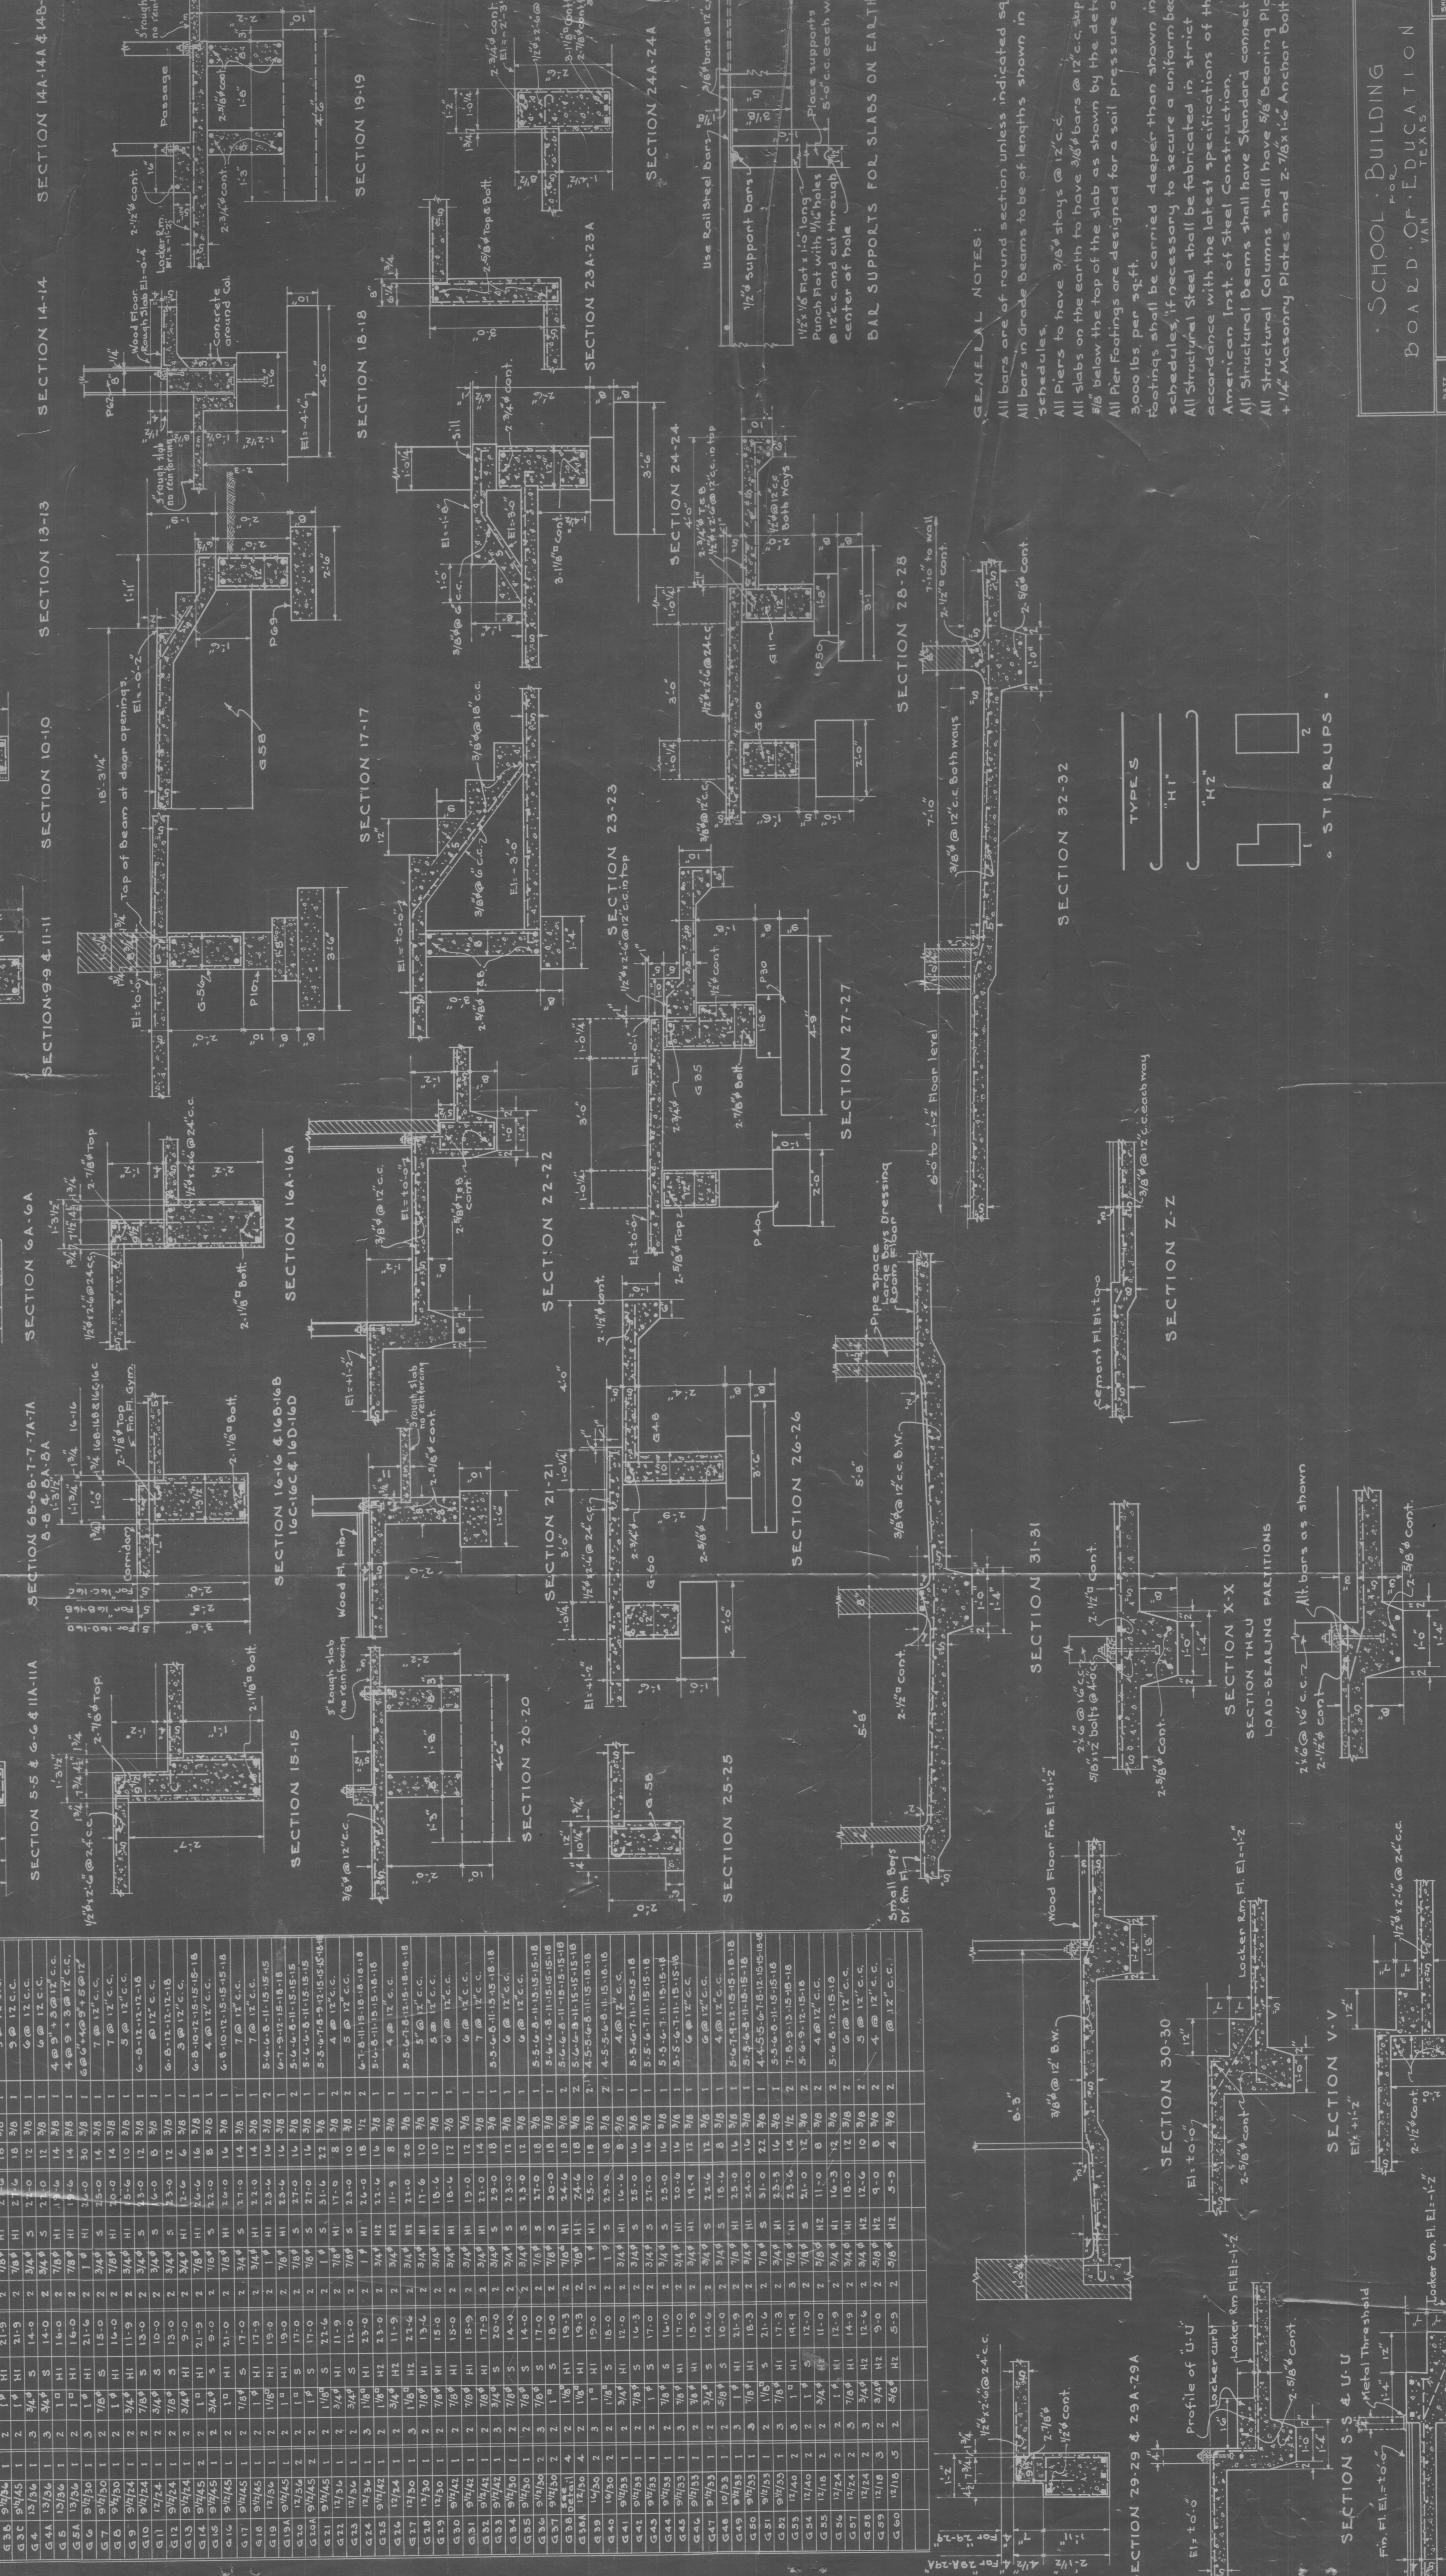

**GENERAL NOTES:**

All bars are of round section unless indicated square.

All bars in grade beams to be of lengths shown in schedules.

All piers to have 3/8" stays @ 12" c.c.

All slabs on the earth to have 3/8" stays @ 12" c.c. supported #16 below the top of the slab as shown by the details.

All Pier Footings are designed for a soil pressure of 3000 lbs. per sq. ft.

Reinforcing shall be carried deeper than shown in the schedules if necessary to secure a uniform bearing.

All Structural Steel shall be fabricated in strict accordance with the latest specifications of the American Inst. of Steel Construction.

All Structural Beams shall have Standard connections.

All Structural Columns shall have 5/8" bearing plates + 1/4" Masonry Plates and 2-7/8" x 1-1/2" Anchor Bolts.